


APPROVAL SHEET

RJM SERIES

MELF TYPE METAL FILM RESISTORS

RJM 系列



| PRODUCE | CHECK AND APPROVE | ACCEPTED BY |
|---------------|-------------------|--------------------|
| EM | CE | HONORABLE CUSTOMER |
| Edison Chen | Charles Chen | |
| Sept 19, 2018 | Sept 19, 2018 | |

1. PRODUCT: METAL FILM MELF TYPE PRECISION RESISTORS

2. PART NUMBER: Part number of the melf type precision metal film resistor is identified by the type name, power rating and size code, tolerance, temperature coefficient, packing type and resistance value.

Example:

| RJM | 16M | 0207 | F | 2 | T | 1004 |
|-------------|-----------|-------------|----------------------|---------------------------------------|---------------|------------------|
| Series Name | Size Code | Metric Size | Resistance Tolerance | Temperature Coefficient of Resistance | Packing Style | Resistance Value |

(1) Type name: RJM series

(2) Power Rating: 72P=0.20W; 73P=0.25W; 74M=0.4W;

74P=0.60W; 16M=1.0W; 17M=2W; 18M=3W

(3) Metric size: DIN: 0102, DIN: 0204, DIN:0207, DIN0411, DIN0617

(4) Tolerance: W=±0.05%; B=±0.1%; C=±0.25%; D=±0.5%; F=±1%; G=±2%


(5) T.C.R.: 7= ±5ppm/°C; 6= ±10ppm/°C; 5=±15ppm/°C; 3=±25ppm/°C; 2= ±50ppm/°C; 1=±100ppm/°C; 0=No TCR test request

(6) Packaging Type: B=BULK/BOX
T=REEL/BOX

(7) Resistance Value: 100K(1003); 22K5(2252); 2K15(2151); 120R(1200); 10R(10R0); 1.8R(1R80); 0.99R(R990).....


(8) RJM73P020400TR000 and RJM74P020700TR000 are jumpers with resistance lower than 15mΩ

3. Structure of the resistors:




4. COLOR BAND-CODE:

Four color bands codes for size 0102 and 0204.



| 颜色 | 1 st | 2 nd | 3 rd | 倍率 |
|----|-----------------|-----------------|-----------------|------------------|
| 黑色 | 0 | 0 | 0 | 1 |
| 棕色 | 1 | 1 | 1 | 10 |
| 红色 | 2 | 2 | 2 | 10 ² |
| 棕色 | 3 | 3 | 3 | 10 ³ |
| 黄色 | 4 | 4 | 4 | 10 ⁴ |
| 绿色 | 5 | 5 | 5 | 10 ⁵ |
| 蓝色 | 6 | 6 | 6 | 10 ⁶ |
| 紫色 | 7 | 7 | 7 | 10 ⁷ |
| 灰色 | 8 | 8 | 8 | |
| 白色 | 9 | 9 | 9 | |
| 金色 | | | | 10 ⁻¹ |
| 银色 | | | | 10 ⁻² |

Five color bands for size 0207, 0411, 0516 and 0617



| 颜色 | 1 st | 2 nd | 3 rd | 倍率 | 精度 |
|----|-----------------|-----------------|-----------------|------------------|-----------|
| 黑色 | 0 | 0 | 0 | 1 | |
| 棕色 | 1 | 1 | 1 | 10 | F(±1.0%) |
| 红色 | 2 | 2 | 2 | 10 ² | G(±2.0%) |
| 棕色 | 3 | 3 | 3 | 10 ³ | |
| 黄色 | 4 | 4 | 4 | 10 ⁴ | |
| 绿色 | 5 | 5 | 5 | 10 ⁵ | D(±0.50%) |
| 蓝色 | 6 | 6 | 6 | 10 ⁶ | C(±0.25%) |
| 紫色 | 7 | 7 | 7 | | B(±0.10%) |
| 灰色 | 8 | 8 | 8 | | |
| 白色 | 9 | 9 | 9 | | |
| 金色 | | | | 10 ⁻¹ | J(±5.0%) |
| 银色 | | | | 10 ⁻² | K(±10%) |

5. ELECTRICAL CHARACTERISTICS


| | | | | | | | | |
|---------------------------------|--|--|--|--|--|--|---|--------------------|
| Type | RJM72P | RJM73P | RJM74M | RJM74P | RJM16M | RJM17M | RJM18M | 型号 |
| Metric type | DIN: 0102 | DIN: 0204 | DIN: 0204 | DIN: 0207 | DIN: 0207 | DIN: 0411 | DIN: 0617 | 德国工业标准型号 |
| Standard applied | Q/SLC009-2010; GB/T5729-1994; GB/T9546-1995; GB/T9547-1995 | | | | | | | 技术标准 |
| Cross to Vishay's P/N | MMU0102 | MMA0204 | MMA0204 power | MMB0207 | MMB0207 power | | | 最大短时间过载电压 |
| Cross to Vishay's P/N | SMM0102 | SMM0204 | | | SMM0207 | | | 最大短时间过载电压 |
| Resistance range | 10Ω to 10MΩ | | | | | | | 阻值范围 |
| Resistance tolerance | W(±0.05%); B(±0.10%); C(±0.25%); D(±0.5%); F(±1%); J(±5%) | | | | | | | 精度 |
| Temperature coefficient ppm/°C | C7(±5); C6(±10); C5(±15); C3(±25); C2(±50) | | | | | | | 温度系数 |
| Rated dissipation, P_{70} | 0.20W | 0.25W | 0.40W | 0.60W | 1.0W | 2.0W | 3.0W | P_{70} 70℃以下额定功率 |
| Operating voltage U_{max} | 150V | 200V | 200V | 300V | 350V | 400V | 450V | U_{max} 最大工作电压 |
| Max short time overload voltage | 300V | 400V | 400V | 600V | 700V | 800V | 900V | 最大短时间过载电压 |
| Temperature range | -55℃ to 125℃ | | | | | | | 工作温度范围 |
| Dimension | L=2.0±0.1mm D=1.25±0.1mm K≥0.4; D ₁ ≥D-0.1 | L=3.5±0.2mm D=1.3±0.1mm K≥0.6; D ₁ ≥D-0.2 | L=3.5±0.2mm D=1.3±0.1mm K≥0.6; D ₁ ≥D-0.2 | L=5.7±0.2mm D=2.1±0.1mm K≥0.6; D ₁ ≥D-0.3 | L=6.0±0.2mm D=2.1±0.1mm K≥0.6; D ₁ ≥D-0.3 | L=8.7±0.2mm D=3.1±0.2mm K≥1.0; D ₁ ≥D-0.4 | L=10.7±0.3mm D=4.1±0.2mm K≥1.0; D ₁ ≥D-0.4 | 外型尺寸 |
| Solder pad (recommended) | S=1.1; W=1.2; H=1.6 | S=1.5; W=2; H=2.2 | S=1.5; W=2; H=2.2 | S=2.8; W=3; H=3 | S=3.2; W=3; H=3.5 | S=5.6; W=4; H=4 | S=8.1; W=5; H=5 | 建议焊盘尺寸 |
| Outlines |  | | | | | | | 外观 |
| Minimum packing quantity | 3000 | 3000 | 3000 | 2000 | 2000 | 2500 | 2000 | 最小包装数量 |

- * Unless otherwise specified, all values are tested at the following condition:
Temperature: 21℃ to 25℃; Relative humidity: 45% to 70%;
The parts must be well soldering with good soldering pads.
- * Rated Continuous Working Voltage (RCWV)= $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$
- * Resistance value out of range is available on request.
- * Terminal caps of the resistors are all with three electroplating: the inner is copper plating + nickel plating to minimize the tin whisker phenomenon and final plating is tin to improve the solderability.
- * The thickness of 3 layers of 0204 size are Cu:>1μm + Ni:>0.5μm + Tin:>3μm.
- * The post high temperature treatment after final tin plating is strictly controlled by our production procedure to minimize the tin whisker phenomenon
- * The resistances of all **jumpers** are lower than **15mΩ**


6. Derating curves

The power dissipation on the resistor generates a temperature rise against the local ambient, depending on the heat flow support of the printed-circuit board (thermal resistance). The rated dissipation applies only if the permitted film temperature is not exceeded. These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional lifetime.


For MELF resistors working at an ambience temperature of 70°C or above, the power rating shall be derated in accordance with the above curves.

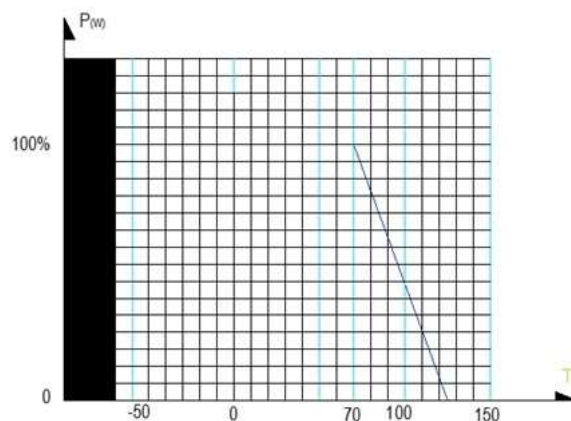

7. Pulse load capability

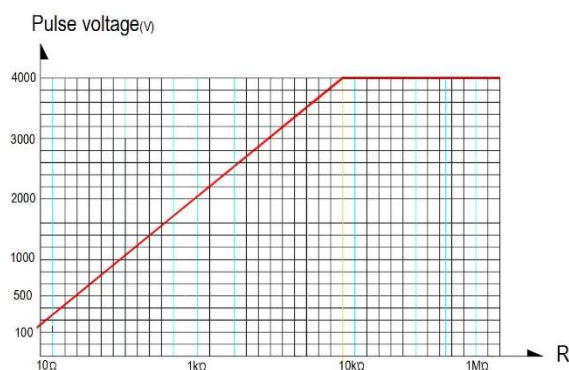

Pulse load rating in accordance with IEC 60115-1,4.27; **1.2µs/50µs**; 5 pulses loaded, for permissible resistance change $< \pm(0.5\% + 0.05\Omega)$

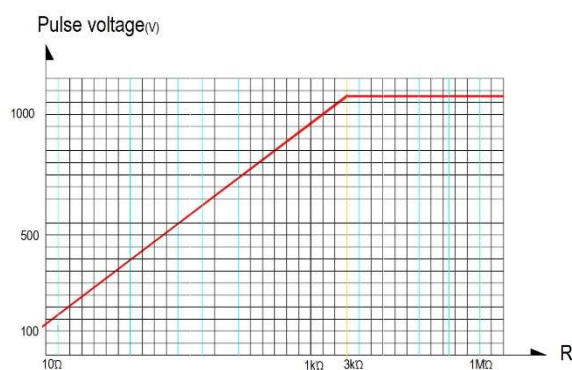

Pulse load rating in accordance with IEC 60115-1,4.27; **10µs/700µs**; 10 pulses loaded, for permissible resistance change $< \pm(0.5\% + 0.05\Omega)$



8. ENVIRONMENTAL CHARACTERISTICS

(1) Temperature Coefficient Test

IEC 60115-1, 4.8: Test of resistors at room temperature and 60°C (or 100°C upon request) above room temperature. Then measure the resistance. The Temperature Coefficient is calculated by the following equation and its value should be within the range requested.

$$\text{Resistor Temperature Coefficient} = \frac{R - R_0}{R_0} \times \frac{1}{t - t_0} \times 10^6$$

R = Resistance value under the testing temperature

R₀ = Resistance value at the room temperature

t = the 2nd testing temperature

t₀ = Room temperature

(2) Short Time Over Load Test

IEC60115-1 4.13: At 2.5 times rated voltage or 2 times the maximum working voltage whichever is lower for 5 seconds, the resistor should be free from defects. The change of the resistance value should be within $\pm(0.1\%+0.05\Omega)$ for resistors with tight tolerance and within $\pm(0.2\%+0.05\Omega)$ for resistors with normal tolerance and tiny size as compared with the value before the load.

(3) Solderability

IEC 60115-1, 4.17: 235 \pm 5°C for 3 \pm 0.5 Seconds, there are at least 95% solder coverage on the termination.

(4) Resistance to soldering heat:

IEC 60115-1, 4.18: 260 \pm 3°C for 10 \pm 1 Seconds, immersed to a point 3 \pm 0.5mm from the body. The change of the resistance value should be within $\pm(0.15\%+0.05\Omega)$ as compared with the value before the test.

(5) Rapid change of temperature (Thermal shock)

IEC 60115-1, 4.19: 30 min at LCT; 30 min at UCT; LCT = -55°C; UCT = 125°C. 5 cycle from LCT to room Temp. and to UCT and to room Temp.. The change of the resistance value shall be within $\pm(0.25\%+0.05\Omega)$ for resistors with tight tolerance and within $\pm(0.50\%+0.05\Omega)$ for resistors with normal tolerance and tiny size as compared with the value before the load.



(6) Damp Heat Steady State

IEC 60115-1, 4.24: $40 \pm 2^{\circ}\text{C}$, 90-95% RH for 56 days, loaded with 0.1 times RCWV or the maximum working voltage whichever is lower. The change of the resistance value should be within $\pm (0.25\% + 0.05\Omega)$ for resistors with tight tolerance and within $\pm (1\% + 0.05\Omega)$ for resistors with normal tolerance and tiny size as compared with the value before the load.

(7) Load Life Test

IEC 60115-1, 4.25: $70 \pm 2^{\circ}\text{C}$ at RCWV or the maximum working voltage whichever is lower for 1,000+48/-0 Hr. (1.5Hr. on, 0.5Hr. off). The resistors shall be arranged not much effected mutually by the temperature of others and the excessive ventilation shall not be performed.

The change of the resistance value should be within $\pm (0.25\% + 0.05\Omega)$ for resistors with tight tolerance and within $\pm (1\% + 0.05\Omega)$ for resistors with normal tolerance and tiny size as compared with the value before the load.

(8) Endurance at upper category temperature

IEC60115-1, 4.25.3: put resistors in over with temperature at 125°C for 1000h. The change of the resistance value should be within $\pm (0.25\% + 0.05\Omega)$ for resistors with tight tolerance and within $\pm (1\% + 0.05\Omega)$ for resistors with normal tolerance and tiny size as compared with the value before the load.

(9) Accidental Overload Test

IEC 60115-1, 4.26: 4 times RCWV or 2 times the maximum working voltage whichever is lower for 1 Minute. No evidence of flaming or arcing.

(10) Component solvent resistance

IEC 60115-1, 4.29: Isopropyl alcohol; 50°C ; method 2. No visible damage.

(11) Solvent resistance of marking

IEC 60115-1, 4.30: Isopropyl alcohol; 50°C ; method 1, toothbrush. Marking legible; no visible damage



(12) Resistance to Solvent

IEC 60115-1, 4.30: IPA for 5 ± 0.5 Min. with ultrasonic. Marking legible; no visible deterioration occurred.

(13) Flammability

IEC 60115-1, 4.35: IEC 60695-11-5 (1), needle flame test; 10 s. No burning after 30 seconds.

(14) Damp heat, steady state, accelerated

IEC 60115-1, 4.37: $(85 \pm 2)^{\circ}\text{C}$, $(85 \pm 5)\%$ RH; $U = 0.3 \times \text{RCWV}$ or $U = 0.3 \times U_{\text{max}}$ or 100V whichever is lower for 1000 hours. The change of the resistance value should be within $\pm(0.25\% + 0.05\Omega)$ for resistors with tight tolerance and within $\pm(1\% + 0.05\Omega)$ for resistors with normal tolerance and tiny size as compared with the value before the load.

(15) Electrostatic discharge (Human Body Model)

IEC 60115-1, 4.38: IEC 61340-3-1 (1); 3 pos. + 3 neg. discharges.

RJM72P0102: 1.5kV; RJM73P0204: 2kV; RJM74P0207: 3kV;

RJM16M0207: 3 kV; RJM17M0411: 4kV; RJM18M0617: 6kV

The change of the resistance value should be within $\pm(0.50\% + 0.05\Omega)$ as compared with the value before the load.

(16) Damp Heat Steady State Accelerated

IEC 60115-1, 4.39: $(85 \pm 2)^{\circ}\text{C}$; $(85 \pm 5)\%$ RH; $U = 0.1 \times \sqrt{(P_{25} \times R)} \leq 100\text{V}$, 1000 hour. The change of the resistance shall be within $\pm(0.50\% + 0.05\Omega)$ for tight tolerance and $\pm(1.0\% + 0.05\Omega)$ for normal tolerance as compared with the value before the load.

Disclaimer

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.

Thunder Precision Resistors makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product to the maximum extent permitted by applicable law.